

WIDEX MAGNIFY™ MINI RIC RECHARGEABLE WITH V.2 RIC M-RECEIVER



The WIDEX mRIC R D is part of the WIDEX MAGNIFY™ family. Built around the WIDEX MAGNIFY™ platform to deliver better sound via TruAcoustics™ and all on a brand-new chip with greater connectivity.


Fitting mRIC is easier than ever before, thanks to TruAcoustics™ giving a more powerful personalised sound.

The mRIC is powered by a built-in lithium-ion battery and charged wirelessly by a matching table charger.

WIDEX is offering a brand new design and hearing aid form factor in one-tone colors. App support is offered via the direct bluetooth connection to iOS, which also enables connection to TV PLAY.

- Direct mobile wireless connectivity (2.4 GHz)
- Compatible with the DEX assistive listening devices
- Uses V.2 Easyware M-receiver
- Works with a physically smaller and more powerful receiver that covers a larger fitting range
- Powered by a lithium-ion rechargeable battery
- Hearing loss from mild-to-moderate
- Protection class IP68

SUGGESTED FITTING RANGE

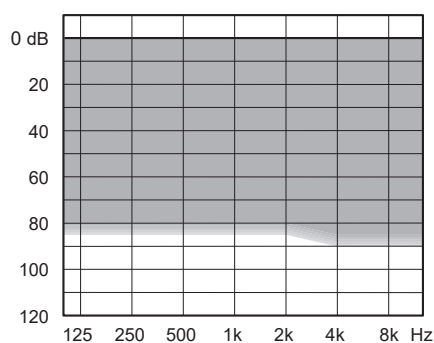

STANDARD TECHNOLOGY

- WIDEX MAGNIFY™ platform with Personal Gain Integrator
- TruAcoustics™ for improved sound and fitting

KEY FEATURES	100
Processing and fine-tuning channels	6
TruAcoustics™ with Personal Gain Integrator	•

CONNECTIVITY

2.4 GHz control (Android and iOS)	•
2.4 GHz audio streaming (iOS)	•
WidexLink to DEX assistive listening devices*	•

APPS FOR iOS AND ANDROID

MAGNIFY App	•
TONELINK App	•
COM-DEX App	•


FEATURES

Adaptation manager	•
Programs	3
Locator	6 ch
Preference Control	•
Programmable Push Button**	•
Soft-level noise reduction	•
Noise Reduction	•
ZEN	•
Audibility Extender	•


*Also includes DEX assistive listening devices: TV-DEX, COM-DEX, RC-DEX, FM+ DEX, TV-PLAY. **Programmable: As a program button and an on/off switch, As a sound adjustment button and an on/off switch, As a dedicated on/off switch.

For information regarding which devices WIDEX MAGNIFY, direct streaming, is compatible with, please go to: global.widex.com/compatibility


MAXIMUM OUTPUT - EAR SIMULATOR

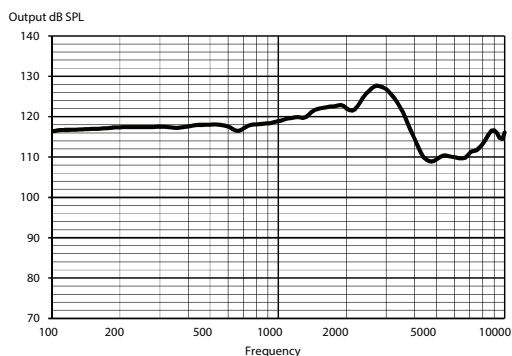


MAXIMUM OUTPUT - 2CC COUPLER

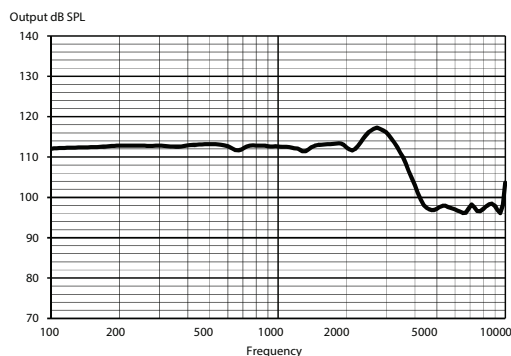

OUTPUT - EAR SIMULATOR

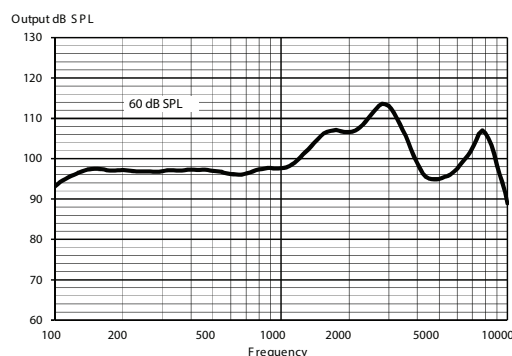

OUTPUT - 2CC COUPLER

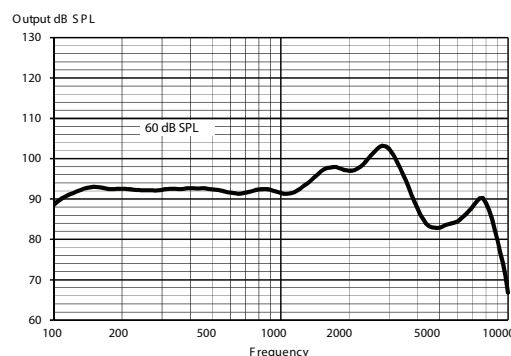

Technical data:

Typical data obtained through standard pure tone measurements. Hearing aid set to Compass Reference Test Gain, unless stated otherwise. Measured using a standard ITE coupler without wax guard. For further information, please contact Widex at global.widex.com.

		EAR SIMULATOR IEC 60118-0:1983 + A1:1994	2CC COUPLER IEC 60118-0:2015, ANSI S3.22-2014
OSPL90	1600 Hz	122 dB SPL	113 dB SPL
	Peak	128 dB SPL	117 dB SPL
	Average	120 dB SPL	114 dB SPL
Acoustic output (Input 60 dB SPL)	1600 Hz	107 dB SPL	98 dB SPL
	Peak	114 dB SPL	103 dB SPL
	Average	100 dB SPL	97 dB SPL
Full-on gain (Input 50 dB SPL, Compass Full-on gain)	1600 Hz	67 dB	58 dB
	Peak	69 dB	61 dB
	Average	64 dB	57 dB
Acoustic frequency range		100 Hz - 10000 Hz	100 Hz - 9200 Hz
Harmonic distortion (typical)	500 Hz	<2%	<2%
	800 Hz	<2%	<2%
	1600 Hz	<2%	<2%
Equivalent input noise		19 dB SPL	20 dB SPL
Battery drain (standby)		1.18 mA	1.18 mA
Battery drain*		1.25 mA	1.28 mA
Battery life* Rechargeable lithium-ion battery		40 h	40 h
Mobile phone immunity (IEC 60118-13:2016, ANSI C63.19:2011)		IRIL: -29/-26/-8 dB SPL	U-rating: M4

*Battery life in real-life situations depends among other things on the hearing aid features used and streaming time.

Do not modify this equipment without authorization of the manufacturer. Spare parts and instructions for correct repair can be acquired from Widex.