



## Digital mini-BTE with Dual ISP



mind330 is based on the exclusive Widex Integrated Sound Processing platform - Dual ISP

Minimal to severe hearing losses

### Suggested fitting range

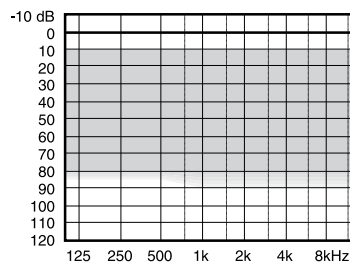

### Dual Integrated Signal Processing

- Dual layer integration of knowledge and performance
- Dynamic Integrator™
- Listening layer
- Awareness layer
- 10 frequency bands
- 10 compression channels

### Main listening features

- HD Locator™
- Audibility Extender™
- Multi-directional Active Feedback Cancelling
- TruSound™ compression system with EDRC
- Noise reduction

### Main awareness features

#### Zen fractal generator

- Fractal computation
- Melody composition

#### Signal integrity

- DAI auto-detect
- High definition program handling

#### Speech and sound synthesis

- SmartSpeak™ generator
- SmartTone generator

### Hearing aid characteristics


- Optional remote control
- Optional volume control
- Program button
- Telecoil

# mind330 m3-9

## Maximum output - Ear simulator

IEC 60118-0


Output dB SPL

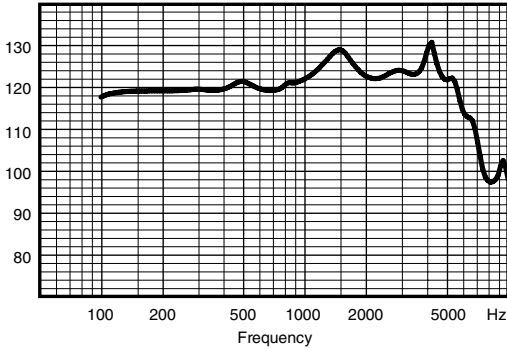

## Maximum output - 2cc coupler

IEC 60118-7 / ANSI S3.22-2003


Output dB SPL

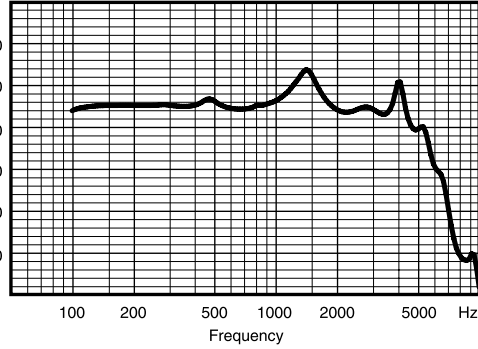

## Output - Ear simulator

IEC 60118-0


Output dB SPL

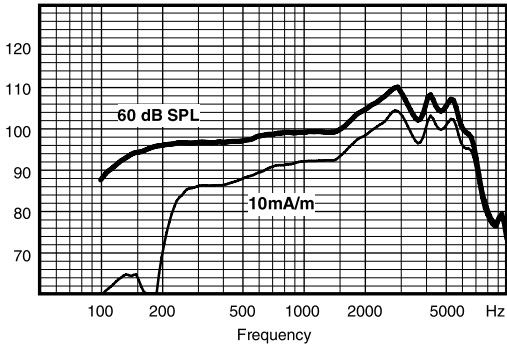

## Output - 2cc coupler

IEC 60118-7 / ANSI S3.22-2003

Output dB SPL

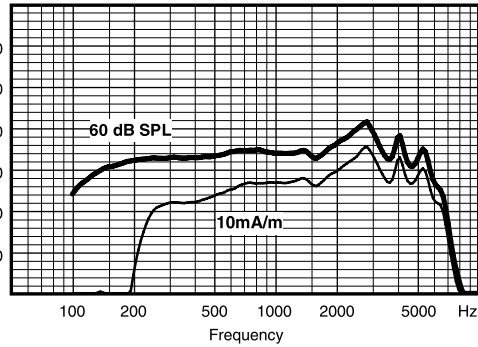

## Technical data

Typical data obtained through standard pure tone measurements.  
Hearing aid set to Compass Test mode 1, unless stated otherwise.  
Measured using a normal hook and standard BTE coupler.

		IEC 60118-0	ANSI S3.22-2003 / IEC 60118-7
OSPL90	2500 Hz Peak Average	123 dB SPL 131 dB SPL 122 dB SPL	114 dB SPL 124 dB SPL 117 dB SPL
Acoustic output (Input 60 dB SPL)	2500 Hz Peak Average	108 dB SPL 111 dB SPL 101 dB SPL	100 dB SPL 102 dB SPL 96 dB SPL
Max gain (Input 50 dB SPL, Compass Max gain test mode)	2500 Hz Peak Average	65 dB 65 dB 58 dB	56 dB 57 dB 51 dB
Telecoil output (Input 10 mA/m)	2500 Hz Peak Average	102 dB SPL 105 dB SPL 93 dB SPL	93 dB SPL 96 dB SPL 89 dB SPL
Frequency range		100 Hz - 7500 Hz	100 Hz - 7150 Hz
Harmonic distortion (Input 70 dB SPL)	500 Hz 800 Hz 1600 Hz	0.9% 0.4% 0.4%	0.6% 0.3% 0.2%
Equivalent input noise		21 dB SPL	25 dB SPL
Battery drain (stand by)		0.85 mA	0.85 mA
Battery drain		0.85 mA	0.85 mA
Battery life / hours (Type 13 Zn-Air, 270 mAh)		325 (>260)	315 (>255)
Mobile phone immunity		IRIL: -33/-8 dB SPL	U-rating: M3/T3

