

# WIDEX MENU™3 POWER BTE MODEL




The new, flexible, 3-channel solution from Widex.

Based on the Flex platform, MENU gives you the option to "build" a hearing aid to suit an individual hearing loss.

Optional features for better performance and sound.

Moderate to severe-to-profound hearing loss.

## SUGGESTED FITTING RANGE

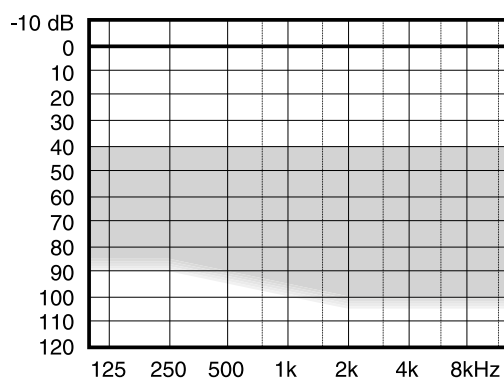

- 3 channels
- Flex platform

### BASIS PACK

- High Level Compression
- Automatic Output Control
- Sound Stabilisers
- Noise reduction SIS
- Directional microphones Omni/Dir
- Multidirectional Active Feedback Cancelling
- 2 listening programs
- SmartTone

### OPTIONAL/COUNTRY DEPENDENT

- HD Locator with Speech Tracer
- Speech Enhancer
- Sound Diary
- SmartSpeak™
- Audibility Extender™
- Zen
- Up to 3 extra listening programs

### ACCESSORIES


- T-DEX
- Remote control
- FM/DAI compatible
- Telecoil
- Volume control

# ME3-19

## MAXIMUM OUTPUT - EAR SIMULATOR

IEC 60118-0


Output dB SPL

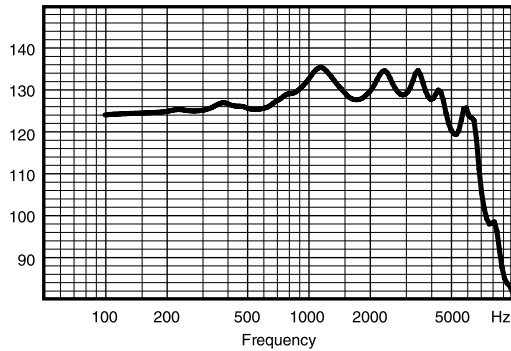

## MAXIMUM OUTPUT - 2CC COUPLER

IEC 60118-7 / ANSI S3.22-2009


Output dB SPL

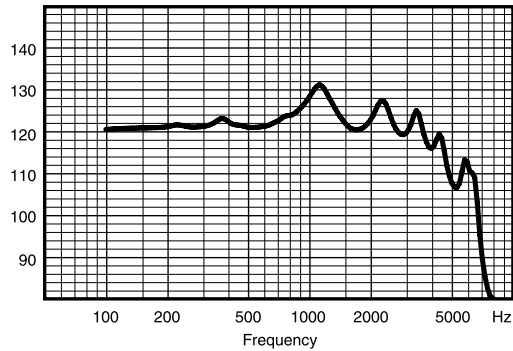

## OUTPUT - EAR SIMULATOR

IEC 60118-0


Output dB SPL

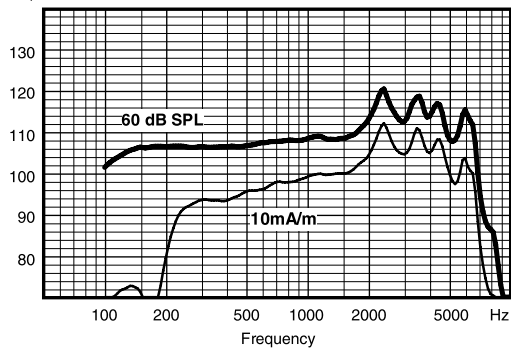

## OUTPUT - 2CC COUPLER

IEC 60118-7 / ANSI S3.22-2009

Output dB SPL

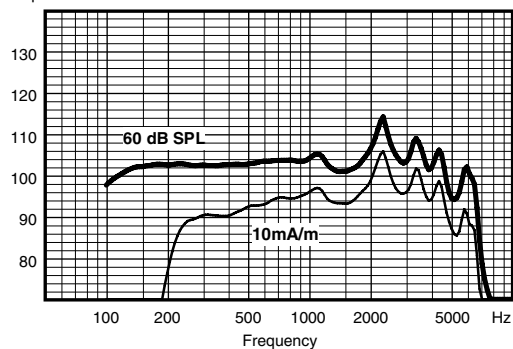

**Technical data** Typical data obtained through standard pure tone measurements.  
Hearing aid set to Compass Test mode 1, unless stated otherwise.  
Measured using a normal hook and standard BTE coupler.

		IEC 60118-0	ANSI S3.22-2009 / IEC 60118-7
OSPL90	2500 Hz	133 dB SPL	124 dB SPL
	Peak	136 dB SPL	131 dB SPL
	Average	129 dB SPL	124 dB SPL
Acoustic output (Input 60 dB SPL)	2500 Hz	118 dB SPL	108 dB SPL
	Peak	121 dB SPL	115 dB SPL
	Average	110 dB SPL	105 dB SPL
Max gain (Input 50 dB SPL, Compass Max gain test mode)	2500 Hz	69 dB	59 dB
	Peak	75 dB	70 dB
	Average	65 dB	59 dB
Telecoil output (Input 10 mA/m)	2500 Hz	110 dB SPL	100 dB SPL
	Peak	113 dB SPL	106 dB SPL
	Average	100 dB SPL	97 dB SPL
Frequency range		100 Hz - 7100 Hz	100 Hz - 6850 Hz
Harmonic distortion (Input 70 dB SPL)	500 Hz	2.2%	2.1%
	800 Hz	0.7%	0.5%
	1600 Hz	0.2%	0.1%
Equivalent input noise		19 dB SPL	22 dB SPL
Battery drain (stand by)		0.8 mA	0.8 mA
Battery drain		0.8 mA	0.85 mA
Battery life / hours (Type 13 Zn-Air, 270 mAh)		330 (>265)	325 (>260)
Mobile phone immunity		IRIL: -11/-10 dB SPL	U-rating: M3 / T3

