

WIDEX MENU™10 MICRO BTE MODEL




The new, flexible, 10-channel solution from Widex.

Based on the Flex platform, MENU gives you the option to "build" a hearing aid to suit an individual hearing loss.

Optional features for better performance and sound.

Minimal to moderately severe hearing loss.

SUGGESTED FITTING RANGE

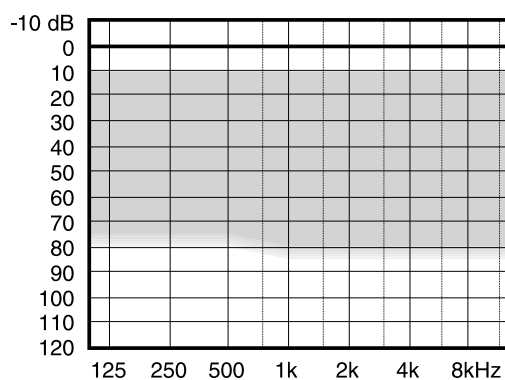

- 10 channels
- Flex platform

BASIS PACK

- High Level Compression
- Automatic Output Control
- Sound Stabilisers
- Noise reduction SIS
- Directional microphones Omni/Dir
- Multidirectional Active Feedback Cancelling
- 2 listening programs
- SmartTone

OPTIONAL/COUNTRY DEPENDENT

- HD Locator with Speech Tracer
- Speech Enhancer
- Sound Diary
- SmartSpeak™
- Audibility Extender™
- Zen
- Up to 3 extra listening programs

ACCESSORIES


- Optional remote control
- Optional programme button

ME10-m

MAXIMUM OUTPUT - EAR SIMULATOR

IEC 60118-0


Output dB SPL

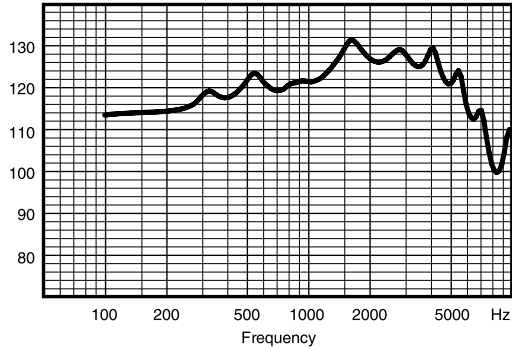

MAXIMUM OUTPUT - 2CC COUPLER

IEC 60118-7 / ANSI S3.22-2009


Output dB SPL

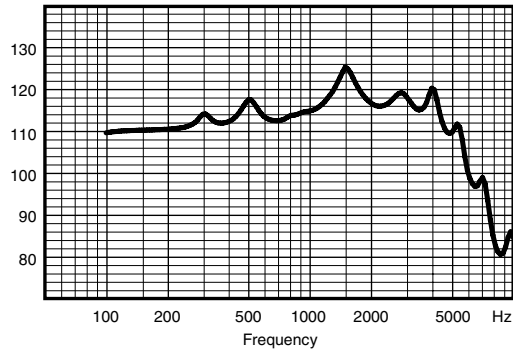

OUTPUT - EAR SIMULATOR

IEC 60118-0


Output dB SPL

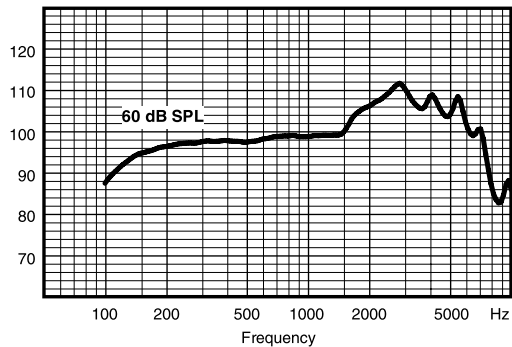

OUTPUT - 2CC COUPLER

IEC 60118-7 / ANSI S3.22-2009

Output dB SPL

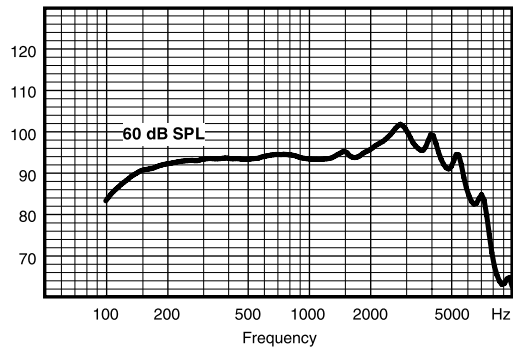

Technical data Typical data obtained through standard pure tone measurements.
Hearing aid set to Compass Test mode 1, unless stated otherwise.
Measured using a normal hook and standard BTE coupler.

		IEC 60118-0	ANSI S3.22-2009 / IEC 60118-7
OSPL90	2500 Hz	128 dB SPL	117 dB SPL
	Peak	132 dB SPL	126 dB SPL
	Average	124 dB SPL	119 dB SPL
Acoustic output (Input 60 dB SPL)	2500 Hz	110 dB SPL	99 dB SPL
	Peak	112 dB SPL	102 dB SPL
	Average	101 dB SPL	96 dB SPL
Max gain (Input 50 dB SPL, Compass Max gain test mode)	2500 Hz	66 dB	56 dB
	Peak	67 dB	58 dB
	Average	57 dB	52 dB
Frequency range		100 Hz - 8100 Hz	100 Hz - 7700 Hz
Harmonic distortion (Input 70 dB SPL)	500 Hz	2%	1.7%
	800 Hz	2.6%	2.2%
	1600 Hz	0.2%	0.2%
Equivalent input noise		20 dB SPL	23 dB SPL
Battery drain (stand by)		0.8 mA	0.8 mA
Battery drain		0.8 mA	0.8 mA
Battery life / hours (Type 10 Zn-Air, 90 mAh)		115 (>90)	110 (>90)
Mobile phone immunity		IRIL: -37/-10 dB SPL	U-rating: M3

