

# WIDEX DREAM™ RIC WITH M-RECEIVER AND **TRUEISP**


## 4 PERFORMANCE LEVELS 440/330/220/110



The WIDEX DREAM RIC uses our unique wireless WidexLink technology and the new TRUE ISP, True-Input technology platform. Volume control and program shift via RC-DEX/M-DEX. Uses a size 10 battery.

Minimal to severe hearing losses

### SUGGESTED FITTING RANGE

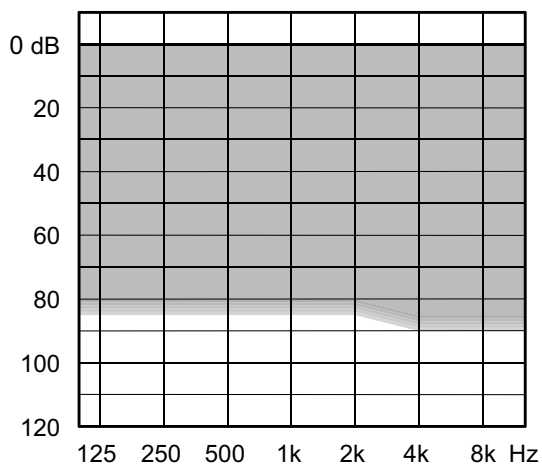

### STANDARD TECHNOLOGY

- **TRUEISP**
- True-Input technology
- WidexLink - Wireless connectivity
- InterEar functionality
- Multiple earware options

KEY FEATURES	440	330	220	110
Performance	xxxxx	xxxx	xxx	xx
Processing channels	15	10	5	3
TruSound Softener	X	X		
HD Locator/Locator	HD	HD	HD	X
Feedback cancelling (IE-InterEar)	IE	IE	IE	
Digital Pinna	X	X		
Speech Enhancer (IE-InterEar)	IE	X		
Personal Audibility Extender	X	X	X	X
Personal Acclimatisation	X	X	X	X
Number of programs*	5	4	3	2
Personal Zen	IE			
InterEar Partner Monitor	IE			
Reverse focus	X	X	X	
SmartSpeak/SmartTone	X	X	X	X

DEX ACCESSORIES	X	X	X	X
RC-DEX, TV-DEX, M-DEX, FM+DEX, PHONE-DEX <sup>1</sup>				

\* Plus Zen+


<sup>1</sup> Available in Europe

# D-PA

## MAXIMUM OUTPUT - EAR SIMULATOR

IEC 60118-0


Output dB SPL

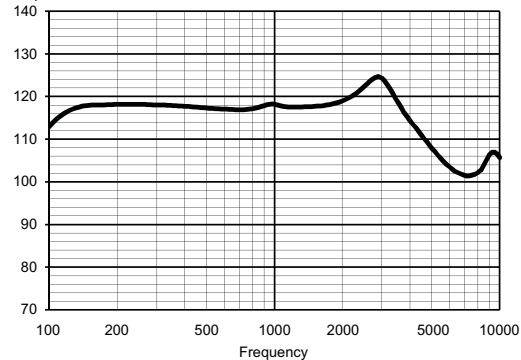

## MAXIMUM OUTPUT - 2CC COUPLER

IEC 60118-7 / ANSI S3.22-2009


Output dB SPL

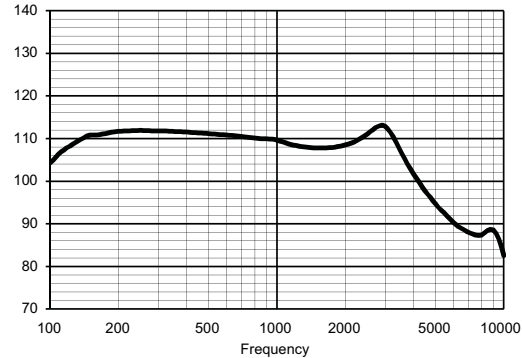

## OUTPUT - EAR SIMULATOR

IEC 60118-0


Output dB SPL

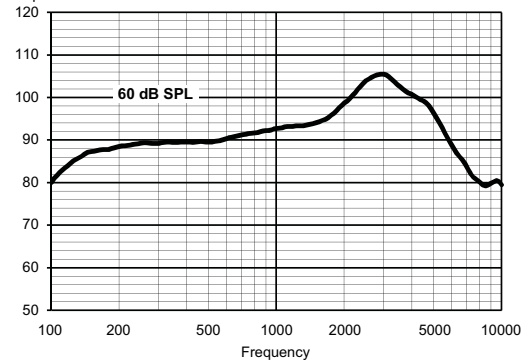

## OUTPUT - 2CC COUPLER

IEC 60118-7 / ANSI S3.22-2009

Output dB SPL

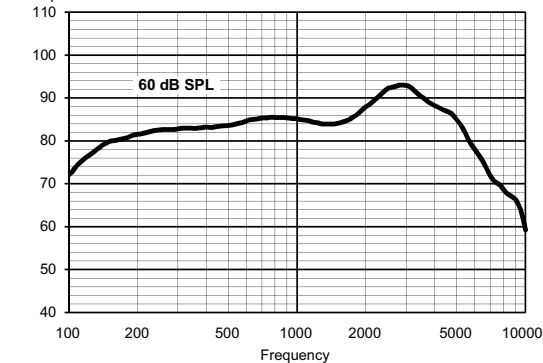

**Technical data** Typical data obtained through standard pure tone measurements.  
Hearing aid set to Compass Test mode 1, unless stated otherwise.  
Measured using a standard ITE coupler without wax guard.

		IEC 60118-0	ANSI S3.22-2009 / IEC 60118-7
OSPL90	2500 Hz	122 dB SPL	111 dB SPL
	Peak	125 dB SPL	113 dB SPL
	Average	118 dB SPL	110 dB SPL
Acoustic output (Input 60 dB SPL)	2500 Hz	103 dB SPL	92 dB SPL
	Peak	105 dB SPL	93 dB SPL
	Average	93 dB SPL	87 dB SPL
Max gain (Input 50 dB SPL, Compass Max gain test mode)	2500 Hz	70 dB	59 dB
	Peak	70 dB	59 dB
	Average	65 dB	57 dB
Frequency range		100 Hz - 9200 Hz	100 Hz - 8760 Hz
Harmonic distortion (Input 70 dB SPL)	500 Hz	<2%	<2%
	800 Hz	<2%	<2%
	1600 Hz	<2%	<2%
Equivalent input noise		20 dB SPL	24 dB SPL
Battery drain (stand by)		0.96 mA	0.96 mA
Battery drain		0.96 mA	0.98 mA
Battery life / hours (Type 10 Zn-Air, 90 mAh)		95 (>85)	90 (>85)
Mobile phone immunity		IRIL: -28/4 dB SPL	U-rating: M4

