

# WIDEX DREAM™ MICRO-BTE WITH **TRUEISP**


## 4 PERFORMANCE LEVELS 440/330/220/110



The WIDEX DREAM micro-BTE uses our unique wireless WidexLink technology and the new TRUE ISP, True-Input technology platform. Volume control and program shift via RC-DEX/M-DEX. Uses a size 10 battery

Minimal to moderately severe hearing losses

### SUGGESTED FITTING RANGE

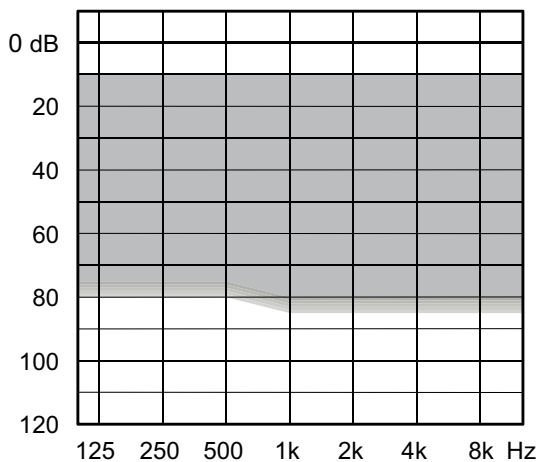

### STANDARD TECHNOLOGY

- **TRUEISP**
- True-Input technology
- WidexLink - Wireless connectivity
- InterEar functionality
- Multiple earware options

KEY FEATURES	440	330	220	110
Performance	xxxxx	xxxx	xxx	xx
Processing channels	15	10	5	3
TruSound Softener	X	X		
HD Locator/Locator	HD	HD	HD	X
Feedback cancelling (IE-InterEar)	IE	IE	IE	
Digital Pinna	X	X		
Speech Enhancer (IE-InterEar)	IE	X		
Personal Audibility Extender	X	X	X	X
Personal Acclimatisation	X	X	X	X
Number of programs*	5	4	3	2
Personal Zen	IE			
InterEar Partner Monitor	IE			
Reverse focus	X	X	X	
SmartSpeak/SmartTone	X	X	X	X

DEX ACCESSORIES	440	330	220	110
RC-DEX, TV-DEX, M-DEX, FM+DEX, PHONE-DEX <sup>1</sup> , T-DEX <sup>2</sup>	X	X	X	X

\* Plus Zen+


<sup>1</sup> Available in Europe

<sup>2</sup> Available in Europe and US/CA/NZ/AUS

# D-m CB


## MAXIMUM OUTPUT - EAR SIMULATOR

IEC 60118-0

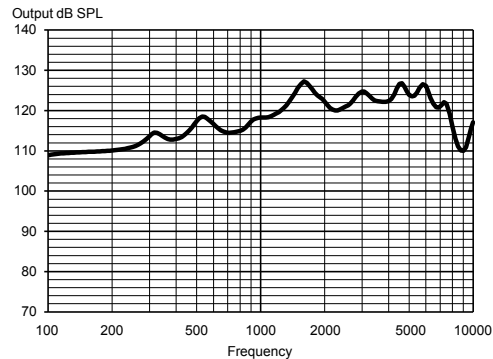


## MAXIMUM OUTPUT - 2CC COUPLER

IEC 60118-7 / ANSI S3.22-2009

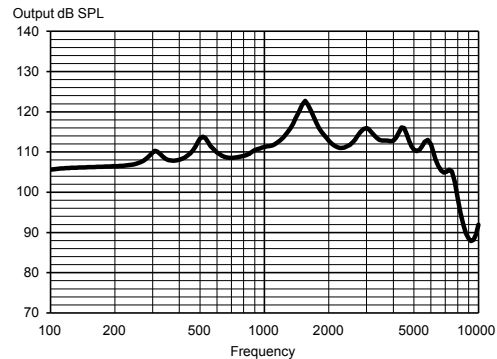


## OUTPUT - EAR SIMULATOR

IEC 60118-0

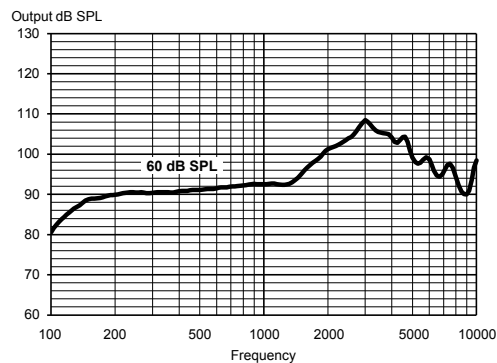

## OUTPUT - 2CC COUPLER

IEC 60118-7 / ANSI S3.22-2009

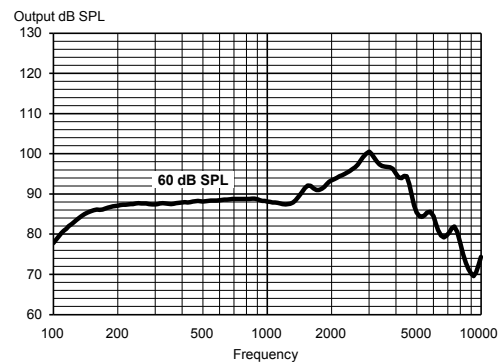

**Technical data** Typical data obtained through standard pure tone measurements.  
Hearing aid set to Compass Test mode 1, unless stated otherwise.  
Measured using a normal hook and standard BTE coupler.

		IEC 60118-0	ANSI S3.22-2009 / IEC 60118-7
OSPL90	2500 Hz	121 dB SPL	112 dB SPL
	Peak	127 dB SPL	123 dB SPL
	Average	119 dB SPL	115 dB SPL
Acoustic output (Input 60 dB SPL)	2500 Hz	104 dB SPL	96 dB SPL
	Peak	108 dB SPL	101 dB SPL
	Average	95 dB SPL	92 dB SPL
Max gain (Input 50 dB SPL, Compass Max gain test mode)	2500 Hz	62 dB	55 dB
	Peak	64 dB	57 dB
	Average	55 dB	51 dB
Frequency range		100 Hz - 10000 Hz	100 Hz - 8600 Hz
Harmonic distortion (Input 70 dB SPL)	500 Hz	<2%	<2%
	800 Hz	<2%	<2%
	1600 Hz	<2%	<2%
Equivalent input noise		23 dB SPL	25 dB SPL
Battery drain (stand by)		1 mA	1 mA
Battery drain		1.01 mA	1.05 mA
Battery life / hours (Type 10 Zn-Air, 90 mAh)		90 (>80)	85 (>80)
Mobile phone immunity		IRIL: -35/-12 dB SPL	U-rating: M4

