

WIDEX DREAM™ ITE WITH **TRUEISP**

4 PERFORMANCE LEVELS


440/330/220/110



The WIDEX DREAM ITE uses our unique wireless WidexLink technology and the new TRUE ISP, True-Input technology platform. Volume control and program shift via RC-DEX/M-DEX. Uses a size 312 battery.

Minimal to moderately severe hearing losses

SUGGESTED FITTING RANGE

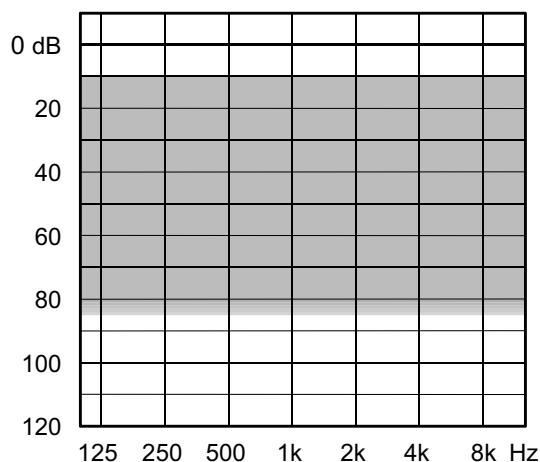

STANDARD TECHNOLOGY

- **TRUEISP**
- True-Input technology
- WidexLink - Wireless connectivity
- InterEar functionality

KEY FEATURES	440	330	220	110
Performance	xxxxx	xxxx	xxx	xx
Processing channels	15	10	5	3
TruSound Softener	X	X		
HD Locator/Locator	HD	HD	HD	X
Feedback cancelling (IE-InterEar)	IE	IE	IE	
Speech Enhancer (IE-InterEar)	IE	X		
Personal Audibility Extender	X	X	X	X
Personal Acclimatisation	X	X	X	X
Number of programs*	5	4	3	2
Personal Zen	IE			
InterEar Partner Monitor	IE			
Reverse focus	X	X	X	
SmartSpeak/SmartTone	X	X	X	X

DEX ACCESSORIES	X	X	X	X
RC-DEX, TV-DEX, M-DEX, FM+DEX, PHONE-DEX ¹ , T-DEX ²				

* Plus Zen+


¹ Available in Europe

² Available in Europe and US/CA/NZ/AUS

MAXIMUM OUTPUT - EAR SIMULATOR

IEC 60118-0


Output dB SPL

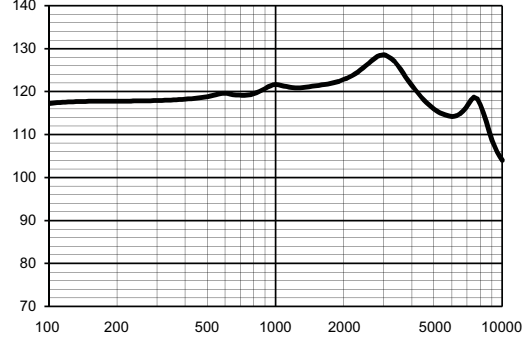

MAXIMUM OUTPUT - 2CC COUPLER

IEC 60118-7 / ANSI S3.22-2009


Output dB SPL

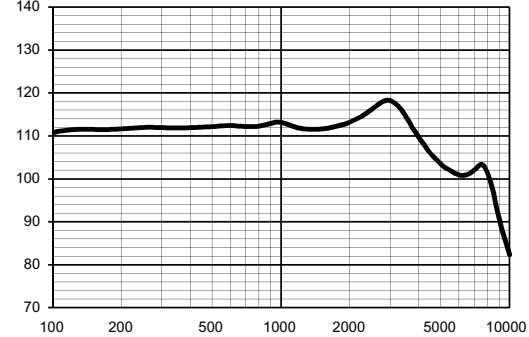

OUTPUT - EAR SIMULATOR

IEC 60118-0


Output dB SPL

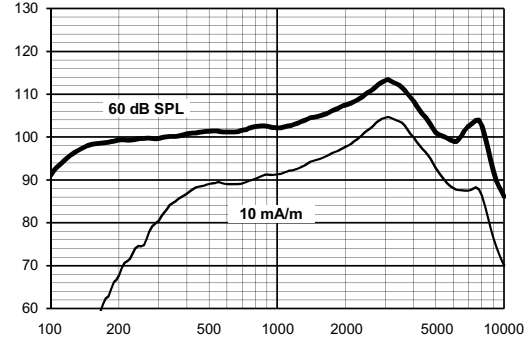

OUTPUT - 2CC COUPLER

IEC 60118-7 / ANSI S3.22-2009

Output dB SPL

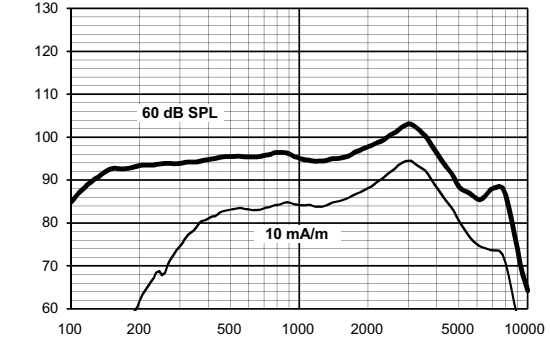

Technical data Typical data obtained through standard pure tone measurements.
Hearing aid set to Compass Test mode 1, unless stated otherwise.
Measured using a standard ITE coupler.

		IEC 60118-0	ANSI S3.22-2009 / IEC 60118-7
OSPL90	2500 Hz	126 dB SPL	116 dB SPL
	Peak	129 dB SPL	118 dB SPL
	Average	121 dB SPL	114 dB SPL
Acoustic output (Input 60 dB SPL)	2500 Hz	110 dB SPL	101 dB SPL
	Peak	114 dB SPL	103 dB SPL
	Average	104 dB SPL	97 dB SPL
Max gain (Input 50 dB SPL, Compass Max gain test mode)	2500 Hz	65 dB	56 dB
	Peak	67 dB	58 dB
	Average	63 dB	55 dB
Telecoil output (Input 10 mA/m)	2500 Hz	102 dB SPL	92 dB SPL
	Peak	105 dB SPL	95 dB SPL
	Average	93 dB SPL	87 dB SPL
Frequency range		100 Hz - 9450 Hz	100 Hz - 8750 Hz
Harmonic distortion (Input 70 dB SPL)	500 Hz	<2%	<2%
	800 Hz	<3%	<2%
	1600 Hz	<2%	<2%
Equivalent input noise		21 dB SPL	24 dB SPL
Battery drain (stand by)		1.00 mA	1.00 mA
Battery drain		1.07 mA	1.34 mA
Battery life / hours (Type 312 Zn-Air, 145 mAh)		135	110
Mobile phone immunity		IRIL: -32/-26 dB SPL	U-rating: M4 / T4

