

WIDEX UNIQUE™ CIC MICRO WITH SOUND CLASS TECHNOLOGY

4 PERFORMANCE LEVELS 440/330/220/110



The WIDEX UNIQUE CIC MICRO is based upon the new WIDEX U-Platform with Sound Class Technology for automated classification of sound environments and optimal sound processing determined by the sound classes.

The non-wireless UNIQUE CIC MICRO-TR is perfect for clients who prefer the smallest possible and most discreet solution, and still with outstanding Sound Class Technology.

Uses a size 10 battery.

Minimal to moderately severe hearing losses.

STANDARD TECHNOLOGY


- U Platform with Sound Class Technology
- Power Saver III technology: Low current consumption

KEY FEATURES	440	330	220	110
Performance	xxxxx	xxxx	xxx	xx
Processing channels	15	10	6	4

UNIQUE FEATURES

FEATURES	440	330	220	110
U platform	•	•	•	•
High-frequency boost	•			
Focus Mode	•	•	•	•
Soft-level noise reduction	•	•	•	•
TruSound Softener	•	•	•	
Speech Enhancer RT	U	U		
Noise Reduction	•	•	•	•
Sound Class Technology	9	5	3	1
Processing and fine tuning channels	15	10	6	4
Audibility Extender	U	U	U	U
Variable Speed Compression	U	U	U	U

SUGGESTED FITTING RANGE

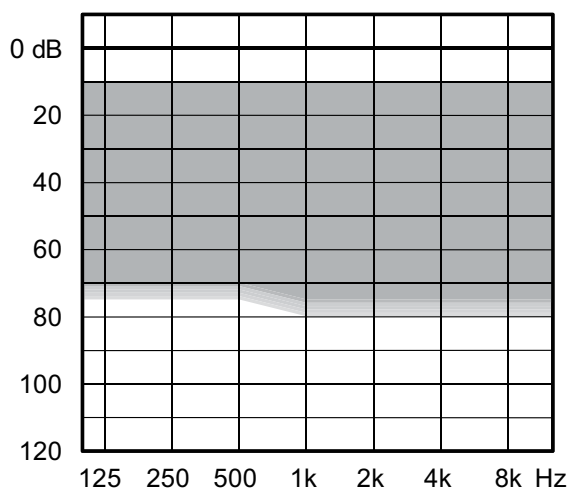


Protection Class IP58

U-CIC-M TR

MAXIMUM OUTPUT - EAR SIMULATOR

IEC 60118-0


Output dB SPL

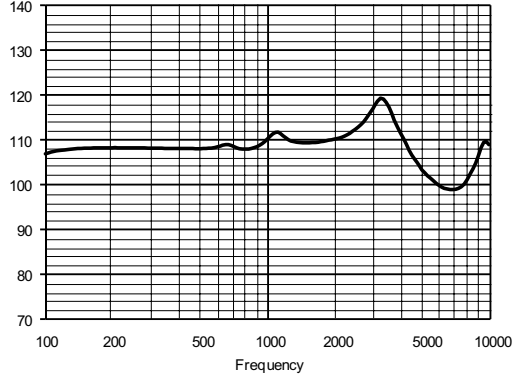

MAXIMUM OUTPUT - 2CC COUPLER

IEC 60118-7 / ANSI S3.22-2009


Output dB SPL

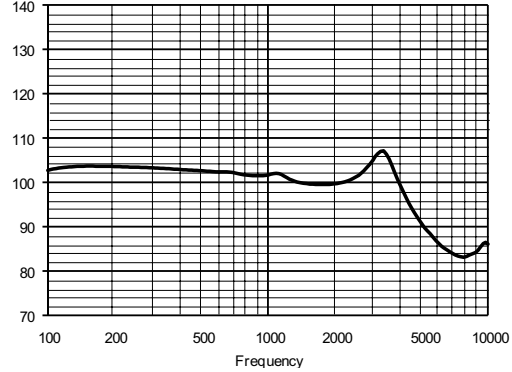

OUTPUT - EAR SIMULATOR

IEC 60118-0


Output dB SPL

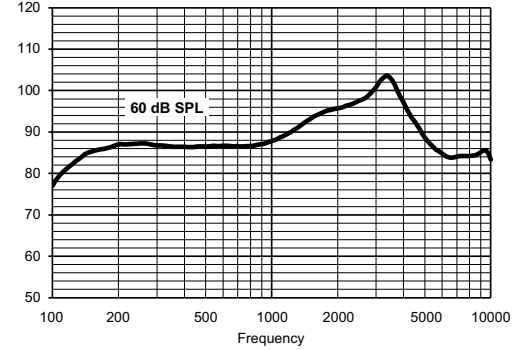

OUTPUT - 2CC COUPLER

IEC 60118-7 / ANSI S3.22-2009

Output dB SPL

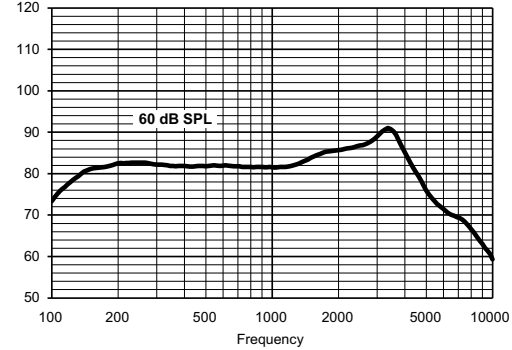

Technical data Typical data obtained through standard pure tone measurements. Hearing aid set to Compass Reference Test Gain, unless stated otherwise. Measured using a standard ITE coupler without wax guard, and with a 5 x 1.55mm tube. For further information, please contact Widex via Widex.com.

		IEC 60118-0	IEC 60118-7 / ANSI S3.22-2009
OSPL90	1600 Hz	109 dB SPL	100 dB SPL
	Peak	118 dB SPL	107 dB SPL
	Average	109 dB SPL	101 dB SPL
Acoustic output (Input 60 dB SPL)	1600 Hz	94 dB SPL	84 dB SPL
	Peak	103 dB SPL	91 dB SPL
	Average	90 dB SPL	84 dB SPL
Full-on gain (Input 50 dB SPL, Compass Full-on gain)	1600 Hz	58 dB	49 dB
	Peak	60 dB	53 dB
	Average	57 dB	49 dB
Frequency range		100 Hz - 10000 Hz	100 Hz - 8600 Hz
Harmonic distortion	500 Hz	<2%	<2%
	800 Hz	<2%	<2%
	1600 Hz	<2%	<2%
Equivalent input noise		26 dB SPL	26 dB SPL
Battery drain (stand by)		0.89 mA	0.89 mA
Battery drain		0.91 mA	0.93 mA
Battery life / hours (Type 10 Zn-Air, 90 mAh)		100 (>80)	95 (>80)
Mobile phone immunity		IRIL: -34/-39/-37 dB SPL	U-rating: M4

