

## WIDEX UNIQUE™ BTE WITH SOUND CLASS TECHNOLOGY

### 4 PERFORMANCE LEVELS 440/330/220/110




The WIDEX UNIQUE BTE is based upon the new WIDEX U-Platform with Sound Class Technology for automated classification of sound environments and optimal sound processing determined by the sound classes.

Wireless connectivity via our WidexLink technology, and compatible with the DEX assistive listening devices.

Uses a size 312 battery.

Minimal to severe-to-profound hearing losses.

#### SUGGESTED FITTING RANGE

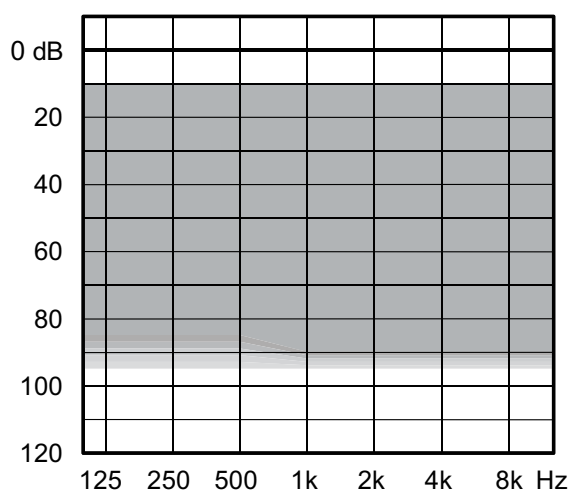

#### STANDARD TECHNOLOGY

- U Platform with Sound Class Technology
- WidexLink wireless connectivity
- InterEar functionality
- Multiple earware options incl. redesigned thintubes
- Power Saver III technology: Low current consumption

KEY FEATURES	440	330	220	110
Performance	xxxxx	xxxx	xxx	xx
Processing channels	15	10	6	4

#### CONNECTIVITY AND WIRELESS COMPATIBILITY

	X Via COM-DEX	X Via COM-DEX	X Via COM-DEX	X Via COM-DEX
App for iPhone, Android and new functionality	X	X	X	X
WidexLink compatible	x	x	x	x
DEX assistive listening devices (using WidexLink)	CALL-DEX, UNI-DEX, COM-DEX, TV-DEX, RC-DEX, FM+ DEX, PHONE-DEX			

#### UNIQUE FEATURES

FEATURES	440	330	220	110
U platform	•	•	•	•
High-frequency boost	•			
Preference control	U	U	U	U
Wind Noise Reduction	U	•	•	•
Digital Pinna	•	•		
Soft-level noise reduction	•	•	•	•
TruSound Softener	•	•	•	
Real Time Speech Enhancer	U/IE	IE		
Noise Reduction	•	•	•	•
Sound Class Technology	9 (IE)	5 (IE)	3	1
HD Locator	15	10	6	Broadband
Programs	5	4	3	3
Processing and fine tuning channels	15	10	6	4
ZEN	IE	IE	IE	•
Audibility Extender	U	U	U	U
Variable Speed Compression	U/IE	U/IE	U/IE	U


Protection Class IP58

# U-FA

## MAXIMUM OUTPUT - EAR SIMULATOR

IEC 60118-0


Output dB SPL

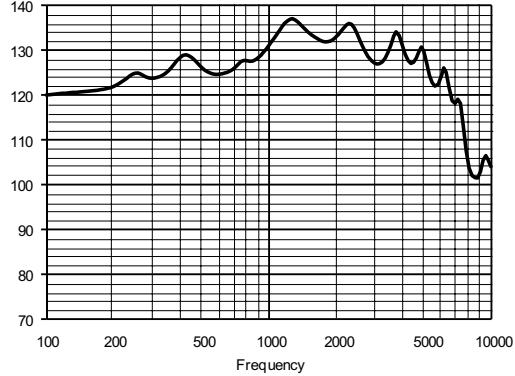

## MAXIMUM OUTPUT - 2CC COUPLER

IEC 60118-7 / ANSI S3.22-2009


Output dB SPL

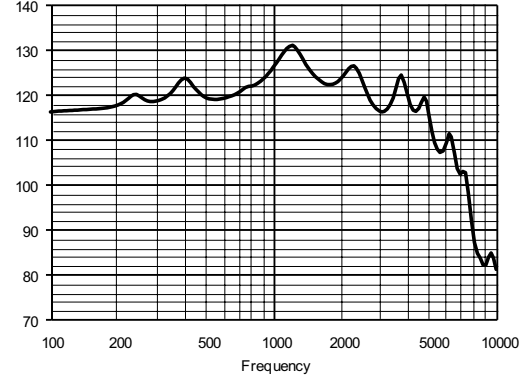

## OUTPUT - EAR SIMULATOR

IEC 60118-0


Output dB SPL

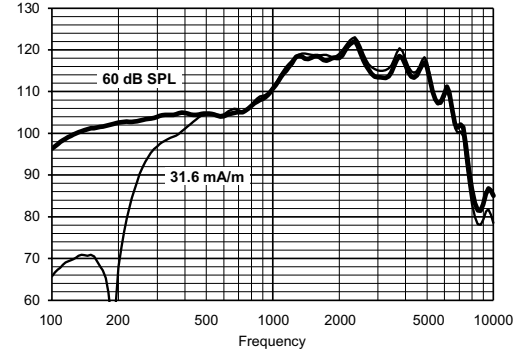

## OUTPUT - 2CC COUPLER

IEC 60118-7 / ANSI S3.22-2009

Output dB SPL

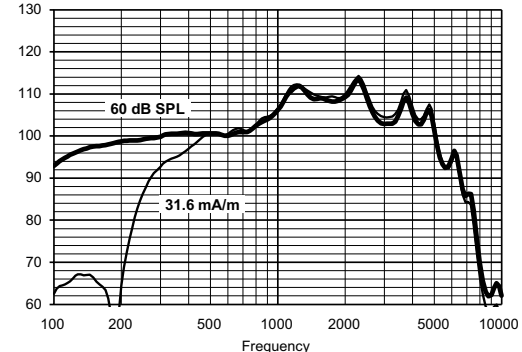

**Technical data** Typical data obtained through standard pure tone measurements. Hearing aid set to Compass Reference Test Gain, unless stated otherwise. Measured using a normal hook and standard BTE coupler. For further information, please contact Widex via [Widex.com](http://Widex.com).

		IEC 60118-0	IEC 60118-7 / ANSI S3.22-2009
OSPL90	1600 Hz	133 dB SPL	124 dB SPL
	Peak	137 dB SPL	131 dB SPL
	Average	130 dB SPL	125 dB SPL
Acoustic output (Input 60 dB SPL)	1600 Hz	118 dB SPL	109 dB SPL
	Peak	122 dB SPL	114 dB SPL
	Average	111 dB SPL	108 dB SPL
Full-on gain (Input 50 dB SPL, Compass Full-on gain)	1600 Hz	64 dB	55 dB
	Peak	71 dB	62 dB
	Average	63 dB	56 dB
Telecoil output (Input 31.6 mA/m)	1600 Hz	118 dB SPL	109 dB SPL
	Peak	123 dB SPL	114 dB SPL
	Average	111 dB SPL	108 dB SPL
Frequency range		100 Hz - 7600 Hz	100 Hz - 6600 Hz
Harmonic distortion	500 Hz	<2%	<2%
	800 Hz	<2%	<2%
	1600 Hz	<2%	<2%
Equivalent input noise		19 dB SPL	20 dB SPL
Battery drain (stand by)		0.98 mA	0.98 mA
Battery drain		1.05 mA	1.04 mA
Battery life / hours (Type 312 Zn-Air, 145 mAh)		140 (>115)	140 (>115)
Mobile phone immunity		IRIL: -25/18/-20 dB SPL	U-rating: M3/T3