


# RIC with S-receiver

## 15/10E/10/5E/5



### Fitting range

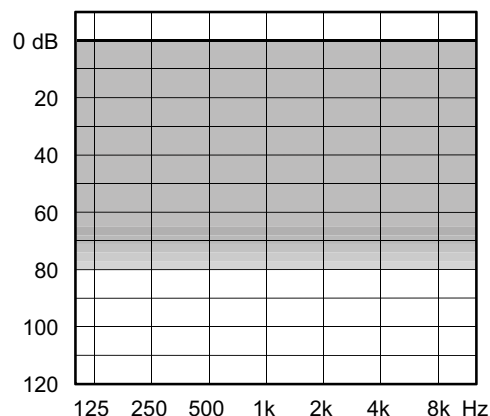

Minimal to severe hearing losses

Key features	15	10E	10	5E	5
Processing channels	15	10	10	5	5
Linked Feedback Cancellation	Linked	Linked	Linked	Linked	•
Automatic Adaptive Directionality	15 ch.	10 ch.	10 ch.	5 ch.	Broadband
Real-Input	•	•	•	•	•
Noise Reduction w. Speech Focus	•	•	•	•	•
Listening programs	5	4	3	3	3
Linked Volume/Program Control	•	•	•	•	•
EasyVoice/EasyTone	•	•	•	•	•
Zen/Zen+	Linked	Linked	Linked	Linked	ZEN (no Zen+)
Sound Stabiliser	•	•	•	•	Basic
Wireless CROS compatible	•	•	•	•	•
RearView	•	•	•	•	
Linear frequency transposition	•	•	•	•	
Real Ear effect	•	•			
Impulse Noise Rejection II	•	•			
Linked Speech Enhancement System	Linked	•			
Linked Compression	•				
Personal Zen	•				
<b>Accessories</b>					
App for iPhone, Android and new functionality	Via COM-DEX	Via COM-DEX	Via COM-DEX	Via COM-DEX	Via COM-DEX
DEX accessories	•	•	•	•	•

### Colours

- 021  
 Warm Beige
- 081  
 Tan Silk
- 072  
 Winter Silver
- 073  
 Titan Grey
- 074  
 Midnight Black
- 071  
 Capp. Brown
- 069  
 Summer Gold


# RIC with S-receiver

## 15/10E/10/5E/5


### Technical data

		IEC 118-0	ANSI S3.22	
Output sound pressure level (Input 90 dB SPL)	2500 Hz	114	103	dB SPL
	Peak	120	108	dB SPL
	Average	111	102	dB SPL
Acoustic output (Input 60 dB SPL)	2500 Hz	93	83	dB SPL
	Peak	95	84	dB SPL
	Average	85	79	dB SPL
Full-on gain (Input 50 dB SPL)	2500 Hz	62	51	dB
	Peak	62	52	dB
	Average	58	50	dB
Frequency range		100 - 10000	100 - 8400	Hz
Total harmonic distortion (Input 70 dB SPL)	500 Hz	<2%	<2%	%
	800 Hz	<2%	<2%	%
	1600 Hz	<2%	<2%	%
Equivalent input noise level		21	25	dB SPL
Battery current (stand by)		0,98	0,98	mA
Battery current		0,98	0,99	mA
Battery life (Type 10 Zn-Air, 90 mAh)		90 (>85)	90 (>85)	h
Mobile phone immunity		IRIL: -30/3 dB SPL	U-rating: M4	


MAXIMUM OUTPUT - EAR SIMULATOR  
IEC 118-0

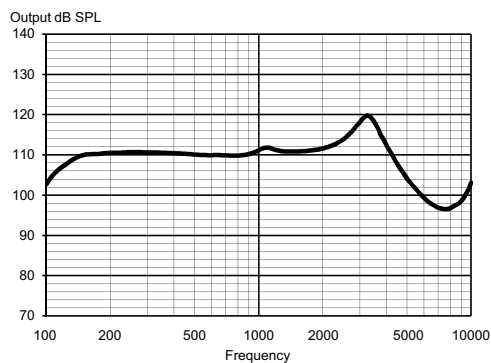

MAXIMUM OUTPUT - 2CC COUPLER  
ANSI S3.22 (2009)

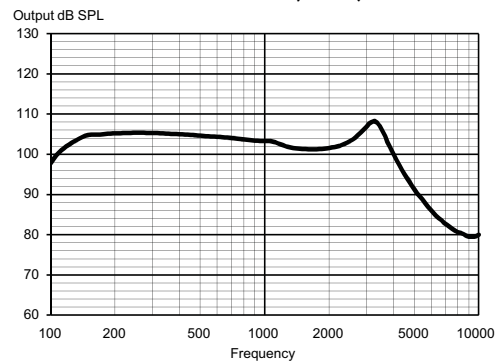

OUTPUT - EAR SIMULATOR  
IEC 118-0

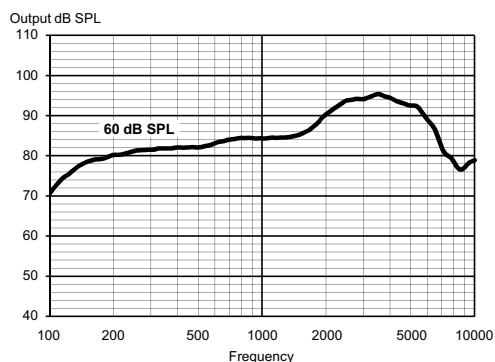

OUTPUT - 2CC COUPLER  
ANSI S3.22 (2009)

