


# RIC with HP-receiver 15/10E/10/5E/5



Fitting range

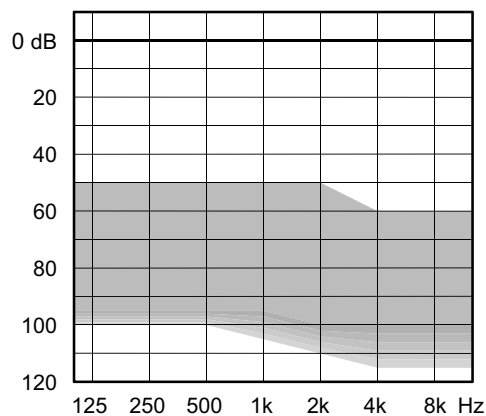

Moderate to severe-to-profound hearing losses

Key features	15	10E	10	5E	5
Processing channels	15	10	10	5	5
Linked Feedback Cancellation	Linked	Linked	Linked	Linked	•
Automatic Adaptive Directionality	15 ch.	10 ch.	10 ch.	5 ch.	Broadband
Real-Input	•	•	•	•	•
Noise Reduction w. Speech Focus	•	•	•	•	•
Listening programs	5	4	3	3	3
Linked Volume/Program Control	•	•	•	•	•
EasyVoice/EasyTone	•	•	•	•	•
Zen/Zen+	Linked	Linked	Linked	Linked	ZEN (no Zen+)
Sound Stabiliser	•	•	•	•	Basic
Wireless CROS compatible	•	•	•	•	•
RearView	•	•	•	•	
Linear frequency transposition	•	•	•	•	
Real Ear effect	•	•			
Impulse Noise Rejection II	•	•			
Linked Speech Enhancement System	Linked	•			
Phone Stream	•	•			
Linked Compression	•				
Personal Zen	•				
<b>Accessories</b>					
App for iPhone, Android and new functionality	Via COM-DEX	Via COM-DEX	Via COM-DEX	Via COM-DEX	Via COM-DEX
DEX accessories	•	•	•	•	•

Colours


- 021  
 Warm Beige
- 081  
 Tan Silk
- 072  
 Winter Silver
- 073  
 Titan Grey
- 074  
 Midnight Black
- 071  
 Capp. Brown
- 069  
 Summer Gold

# RIC with HP-receiver 15/10E/10/5E/5


## Technical data

		IEC 118-0	ANSI S3.22	
Output sound pressure level (Input 90 dB SPL)	2500 Hz	135	125	dB SPL
	Peak	137	132	dB SPL
	Average	132	126	dB SPL
Acoustic output (Input 60 dB SPL)	2500 Hz	119	109	dB SPL
	Peak	119	109	dB SPL
	Average	108	104	dB SPL
Full-on gain (Input 50 dB SPL)	2500 Hz	83	73	dB
	Peak	83	74	dB
	Average	75	70	dB
Telecoil output (Input 10 mA/m)	2500 Hz	109	100	dB SPL
	Peak	109	101	dB SPL
	Average	99	96	dB SPL
Frequency range		100 - 7600	100 - 7200	Hz
Total harmonic distortion (Input 70 dB SPL)	500 Hz	<2	<2	%
	800 Hz	<2	<2	%
	1600 Hz	<2	<2	%
Equivalent input noise level		20	22	dB SPL
Battery current (stand by)		0,97	0,97	mA
Battery current		0,99	0,99	mA
Battery life (Type 312 Zn-Air, 145 mAh)		145 (>135)	145 (>135)	h
Mobile phone immunity		IRIL: 5/-11 dB SPL	U-rating: M4/T2	


**MAXIMUM OUTPUT - EAR SIMULATOR  
IEC 118-0**

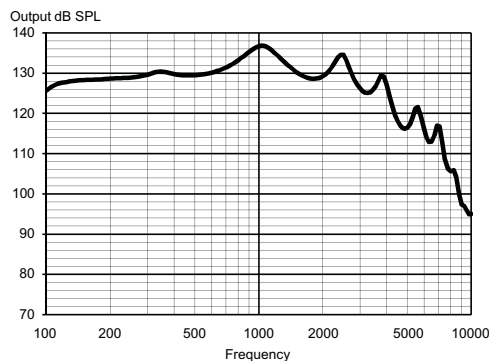

**MAXIMUM OUTPUT - 2CC COUPLER  
ANSI S3.22 (2009)**

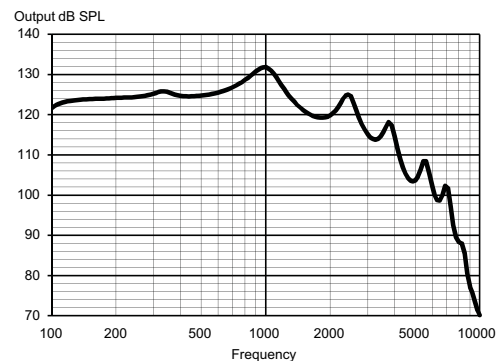

**OUTPUT - EAR SIMULATOR  
IEC 118-0**

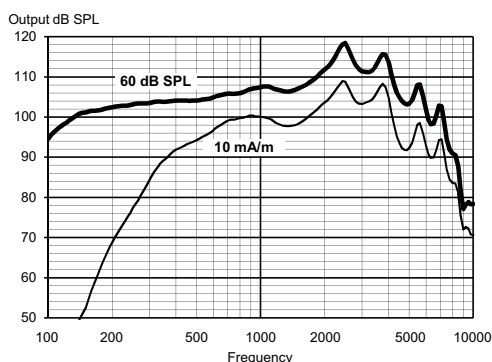

**OUTPUT - 2CC COUPLER  
ANSI S3.22 (2009)**

