


# CIC/CIC MICRO Completely-in-canal

## 15/10E/10/5E/5/3E/3



Fitting range

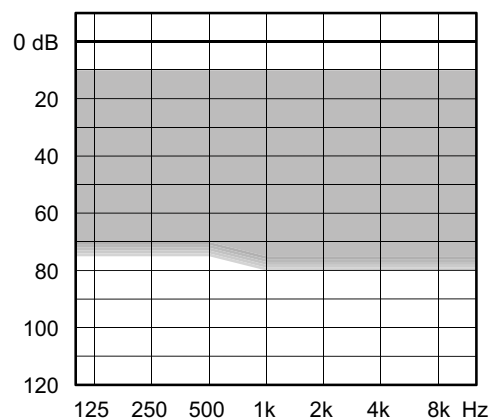

Minimal to moderately severe hearing losses

### COMBINED FEATURES FOR DINAMICO CIC AND CIC MICRO

Key features	15	10E	10	5E	5	3E	3
Processing channels	15	10	10	5	5	3	3
Noise Reduction w. Speech Focus	•	•	•	•	•	Basic	Basic
EasyVoice/EasyTone	•	•	•	•	•	EasyTone only	EasyTone only
Linear frequency transposition	•	•	•	•			
Speech Enhancement System	•	•	•	•			
Impulse Noise Rejection II	•	•					

### Colours

025

Light Beige

107

Dark Brown

028

Clay Brown

### SPECIFIC WIRELESS FEATURES FOR DINAMICO CIC

#### Key features

Linked Feedback Cancellation	Linked	Linked	Linked	Linked	•	•	•
Noise Reduction w. Speech Focus	•	•	•	•	•	Basic	Basic
Listening programs	5	4	3	3	3	3	1
Zen/Zen+	Linked	Linked	Linked	Linked	ZEN (no Zen+)		
Volume/Program Control	Via RC-DEX	Via RC-DEX	Via RC-DEX	Via RC-DEX	Via RC-DEX	Via RC-DEX	
Wireless CROS compatible	•	•	•	•	•	•	
Linked Synchronisation	•	•	•	•			
Linked Speech Enhancement System	Linked	•					
Personal Zen	•						

#### Accessories

App for iPhone, Android and new functionality	Via COM-DEX	Via COM-DEX	Via COM-DEX	Via COM-DEX	Via COM-DEX		
DEX accessories	•	•	•	•	•	RC-DEX only	


# CIC/CIC MICRO Completely-in-canal

## 15/10E/10/5E/5/3E/3


### Technical data

		IEC 118-0	ANSI S3.22	
Output sound pressure level (Input 90 dB SPL)	2500 Hz	122	116	dB SPL
	Peak	124	118	dB SPL
	Average	119	114	dB SPL
Acoustic output (Input 60 dB SPL)	2500 Hz	107	101	dB SPL
	Peak	108	113	dB SPL
	Average	101	97	dB SPL
Full-on gain (Input 50 dB SPL)	2500 Hz	60	56	dB
	Peak	64	58	dB
	Average	63	55	dB
Frequency range		100 - 10000	100 - 8750	Hz
Total harmonic distortion (Input 70 dB SPL)	500 Hz	<2%	<2%	%
	800 Hz	<2%	<2%	%
	1600 Hz	<2%	<2%	%
Equivalent input noise level		21	24	dB SPL
Battery current (stand by) - D-CIC/D-CIC M		0,86 / 0,80	0,86 / 0,80	mA
Battery current - D-CIC/D-CIC M		0,88 / 0,82	0,90 / 0,86	mA
Battery life (Type 10 Zn-Air, 90 mAh)		100(>90)	100 (>90)	h
Mobile phone immunity	D-CIC	IRIL: -32/+2 dB SPL		U-rating: M4
	D-CIC M	IRIL: -32/-32 dB SPL		U-rating: M4


MAXIMUM OUTPUT - EAR SIMULATOR  
IEC 118-0

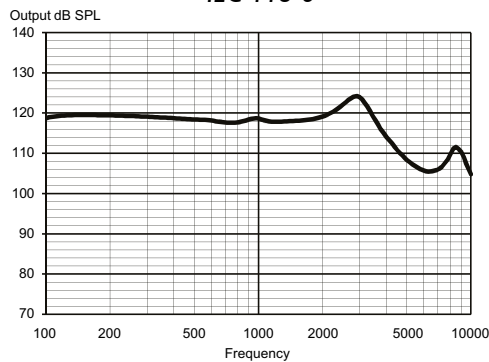

MAXIMUM OUTPUT - 2CC COUPLER  
ANSI S3.22 (2009)

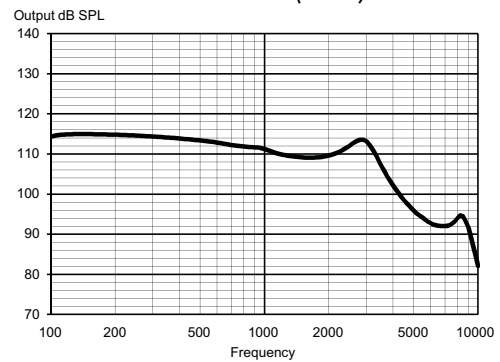

OUTPUT - EAR SIMULATOR  
IEC 118-0

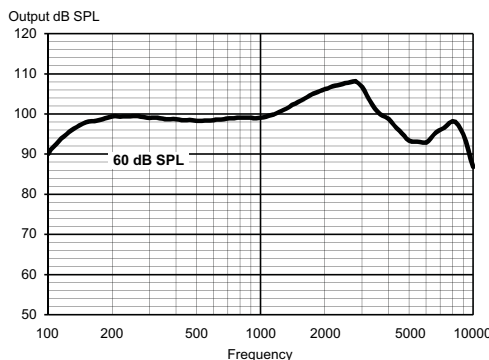

OUTPUT - 2CC COUPLER  
ANSI S3.22 (2009)

