


CIC TR/CIC MICRO TR Completely-in-canal

15/10E/10/5E/5/3E/3



Fitting range

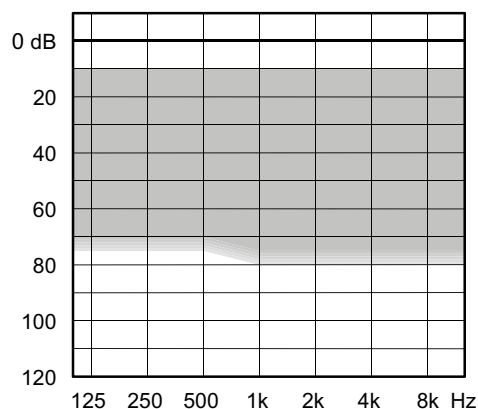

Minimal to moderate hearing losses

COMBINED FEATURES FOR DINAMICO CIC AND CIC MICRO

Key features	15	10E	10	5E	5	3E	3
Processing channels	15	10	10	5	5	3	3
Noise Reduction w. Speech Focus	•	•	•	•	•	Basic	Basic
EasyVoice/EasyTone	•	•	•	•	•	EasyTone only	EasyTone only
Linear frequency transposition	•	•	•	•			
Speech Enhancement System	•	•	•	•			
Impulse Noise Rejection II	•	•					

Colours



Light Beige



Dark Brown



Clay Brown

SPECIFIC WIRELESS FEATURES FOR DINAMICO CIC

Key features	15	10E	10	5E	5	3E	3
Linked Feedback Cancellation	Linked	Linked	Linked	Linked	•	•	•
Noise Reduction w. Speech Focus	•	•	•	•	•	Basic	Basic
Listening programs	5	4	3	3	3	3	1
Zen/Zen+	Linked	Linked	Linked	Linked	ZEN (no Zen+)		
Volume/Program Control	Via RC-DEX	Via RC-DEX	Via RC-DEX	Via RC-DEX	Via RC-DEX	Via RC-DEX	
Wireless CROS compatible	•	•	•	•	•	•	
Linked Synchronisation	•	•	•	•			
Linked Speech Enhancement System	Linked	•					
Personal Zen	•						

Accessories


App for iPhone, Android and new functionality	Via COM-DEX	Via COM-DEX	Via COM-DEX	Via COM-DEX	Via COM-DEX		
DEX accessories	•	•	•	•	•	RC-DEX only	

CIC TR/CIC MICRO TR Completely-in-canal 15/10E/10/5E/5/3E/3


Technical data

		IEC 118-0	ANSI S3.22	
Output sound pressure level (Input 90 dB SPL)	2500 Hz	112	102	dB SPL
	Peak	119	108	dB SPL
	Average	110	102	dB SPL
Acoustic output (Input 60 dB SPL)	2500 Hz	97	87	dB SPL
	Peak	104	94	dB SPL
	Average	94	86	dB SPL
Full-on gain (Input 50 dB SPL)	2500 Hz	60	51	dB
	Peak	60	54	dB
	Average	58	50	dB
Frequency range		100 - 10000	100 - 9100	Hz
Total harmonic distortion (Input 70 dB SPL)	500 Hz	<2%	<2%	%
	800 Hz	<2%	<2%	%
	1600 Hz	<2%	<2%	%
Equivalent input noise level		25	28	dB SPL
Battery current (stand by) - D-CIC TR/D-CIC M TR		0,86 / 0,79	0,86 / 0,79	mA
Battery current - D-CIC TR/D-CIC M TR		0,88 / 0,80	0,90 / 0,85	mA
Battery life (Type 10 Zn-Air, 90 mAh)		100 (>90)	100 (>90)	h
Mobile phone immunity	D-CIC TR	IRIL: <-32/-17 dB SPL		U-rating: M4
	D-CIC M TR	IRIL: <-29/<-29 dB SPL		U-rating: M4


MAXIMUM OUTPUT - EAR SIMULATOR
IEC 118-0

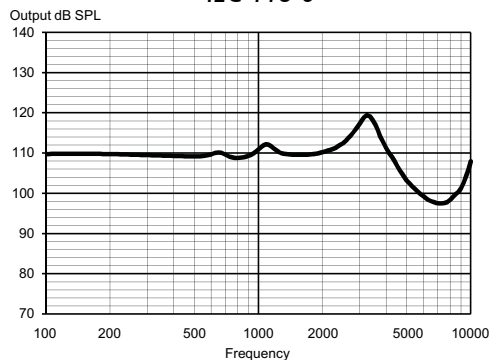

MAXIMUM OUTPUT - 2CC COUPLER
ANSI S3.22 (2009)

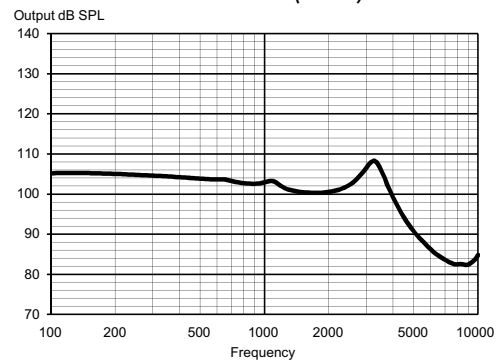

OUTPUT - EAR SIMULATOR
IEC 118-0

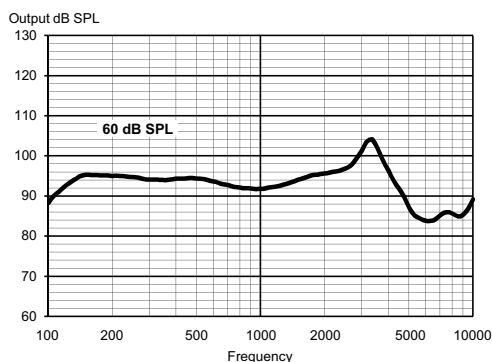

OUTPUT - 2CC COUPLER
ANSI S3.22 (2009)

