


ITE In-the-ear

15/10E/10/5E/5/3E/3



Fitting range

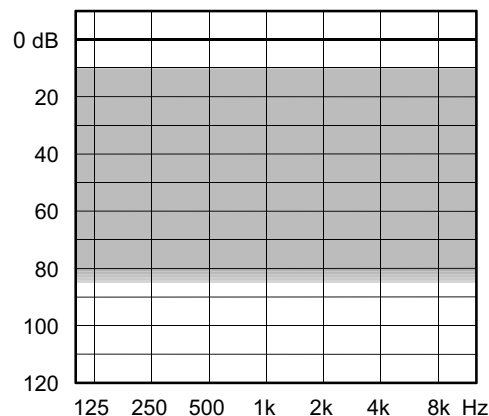

Minimal to moderately severe hearing losses

Key features	15	10E	10	5E	5	3E	3
Processing channels	15	10	10	5	5	3	3
Linked Feedback Cancellation	Linked	Linked	Linked	Linked	Linked	Linked	Linked
Automatic Adaptive Directionality	15 ch.	10 ch.	10 ch.	5 ch.	Broadband	Broadband	Broadband
Real-Input	•	•	•	•	•	•	•
Noise Reduction w. Speech Focus	•	•	•	•	•	Basic	Basic
Listening programs	5	4	3	3	3	3	1
EasyVoice/EasyTone	•	•	•	•	•	EasyTone only	EasyTone only
Zen/Zen+	Linked	Linked	Linked	Linked	ZEN (no Zen+)		
Sound Stabiliser	•	•	•	•	Basic	Basic	Basic
Linked Volume/Program Control	Via RC-DEX	Via RC-DEX	Via RC-DEX	Via RC-DEX	Via RC-DEX	Via RC-DEX	
Wireless CROS compatible	•	•	•	•	•	•	
RearView	•	•	•	•			
Linear frequency transposition	•	•	•	•			
Impulse Noise Rejection II	•	•					
Linked Speech Enhancement System	Linked	•					
Phone Stream	•	•					
Linked Compression	•						
Personal Zen	•						
Accessories							
App for iPhone, Android and new functionality	Via COM-DEX	Via COM-DEX	Via COM-DEX	Via COM-DEX	Via COM-DEX		
DEX accessories	•	•	•	•	•	RC-DEX only	

Colours

- 025
 Light Beige
- 107
 Dark Brown
- 028
 Clay Brown


ITE In-the-ear

15/10E/10/5E/5/3E/3


Technical data

		IEC 118-0	ANSI S3.22	
Output sound pressure level (Input 90 dB SPL)	2500 Hz	126	116	dB SPL
	Peak	129	118	dB SPL
	Average	121	114	dB SPL
Acoustic output (Input 60 dB SPL)	2500 Hz	110	101	dB SPL
	Peak	114	103	dB SPL
	Average	104	97	dB SPL
Full-on gain (Input 50 dB SPL)	2500 Hz	65	56	dB
	Peak	67	58	dB
	Average	63	55	dB
Telecoil output (Input 10 mA/m)	2500 Hz	102	92	dB SPL
	Peak	105	95	dB SPL
	Average	93	87	dB SPL
Frequency range		100 - 9450	100 - 8750	Hz
Total harmonic distortion (Input 70 dB SPL)	500 Hz	<2%	<2%	%
	800 Hz	<3%	<2%	%
	1600 Hz	<2%	<2%	%
Equivalent input noise level		21	24	dB SPL
Battery current (stand by)		1,00	1,00	mA
Battery current		1,07	1,34	mA
Battery life (Type 312 Zn-Air, 145 mAh)		135	110	h
Mobile phone immunity		IRIL: -32/-26 dB SPL	U-rating: M4/T4	


MAXIMUM OUTPUT - EAR SIMULATOR
IEC 118-0

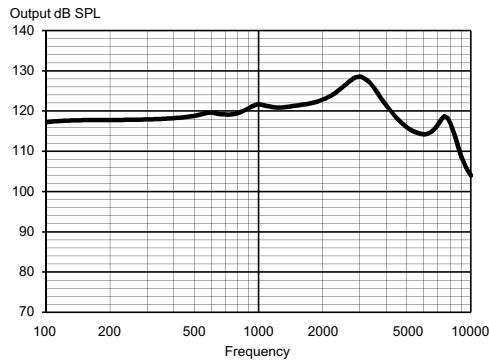

MAXIMUM OUTPUT - 2CC COUPLER
ANSI S3.22 (2009)

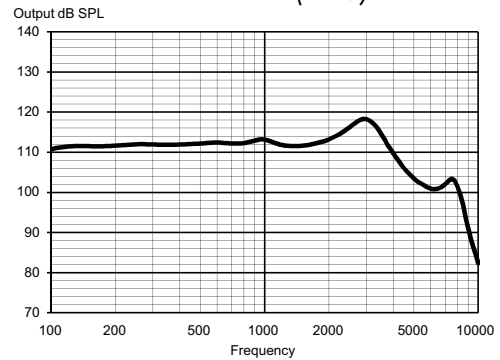

OUTPUT - EAR SIMULATOR
IEC 118-0

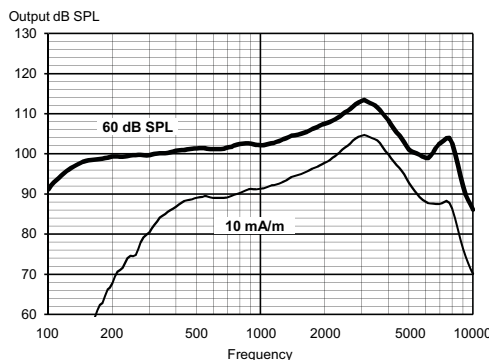

OUTPUT - 2CC COUPLER
ANSI S3.22 (2009)

