


# CIC TR Completely-in-canal

## 15/10E/10/6E/6/4E/4



Fitting range

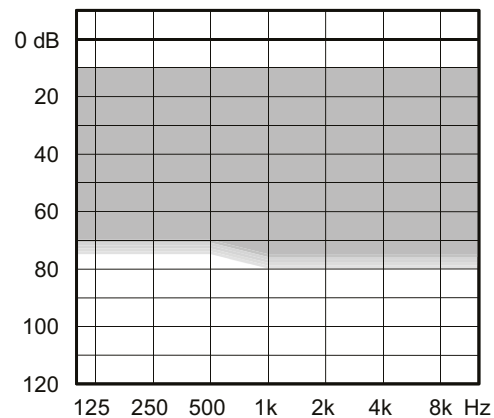

Minimal to moderately severe hearing losses

Key features	15	10E	10	6E	6	4E	4
Processing channels	15	10	10	4	4	4	4
Acoustic Situation Technology	9 (Linked)	5 (Linked)	3	1	1	1	1
Adaptive fast slow compression	•/Linked	•/Linked	•/Linked	•	Classic	Classic	Classic
Programs	5	4	3	3	3	3	1 (3*)
Volumen control II	•	•	•	•	•	•	•
Standard Noise Reduction	•	•	•	•	•	Minimal	Minimal
Zen	Linked	Linked	Linked	•	•	•	
Wireless CROS compatible	•	•	•	•	•	•	
Linear frequency transposition	•	•	•	•			
Ambient Noise Reduction	•	•	•	•			
Impulse Noise Rejection II	•	•	•				
Linked Speech Enhancer II	•/Linked	•					
High frequency boost	•						
<b>Accessories</b>							
App for iPhone, Android and new functionality	Via COM-DEX	Via COM-DEX	Via COM-DEX	Via COM-DEX	Via COM-DEX		
DEX accessories	•	•	•	•	•	RC-DEX/TV-DEX**	

\*3 programs when machted with a hearing aid with program button \*\*Quick match only

Protection Class IP58

### Colours



Light Beige



Clay Brown

# CIC TR Completely-in-canal


## 15/10E/10/6E/6/4E/4

### Technical data


	EAR SIMULATOR IEC 60118-0:1983 + A1:1994		2CC COUPLER IEC 60118-0:2015, ANSI S3.22-2014	
OSPL90	1600 Hz	109	100	dB SPL
	Peak	118	107	dB SPL
	Average	109	101	dB SPL
Acoustic output (Input 60 dB SPL)	1600 Hz	94	84	dB SPL
	Peak	103	91	dB SPL
	Average	90	84	dB SPL
Full-on gain (Input 50 dB SPL)	1600 Hz	58	49	dB
	Peak	60	53	dB
	Average	57	49	dB
Acoustic frequency range		100 - 10000	100 - 8600	Hz
Harmonic distortion (Input 70 dB SPL)	500 Hz	<2	<2	%
	800 Hz	<2	<2	%
	1600 Hz	<2	<2	%
Equivalent input noise		26	26	dB SPL
Battery current (stand by)		0.91	0.91	mA
Battery current		0.93	0.95	mA
Battery life (Type 10 Zn-Air, 100 mAh)		105	105	h
Mobile phone immunity (IEC 60118-13:2016, ANSI C63.19:2011)		IRIL: -37/-32/-26 dB SPL	U-rating: M4	

Typical data obtained through standard pure tone measurements. Hearing aid set to Reference Test Gain, unless stated otherwise. Measured using a standard ITE coupler without wax guard, and with a 5 x 1.55mm tube.


MAXIMUM OUTPUT - EAR SIMULATOR

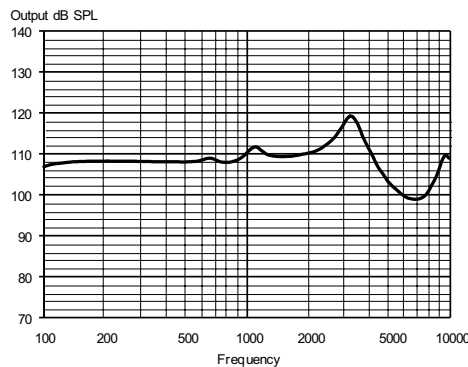

MAXIMUM OUTPUT - 2CC COUPLER

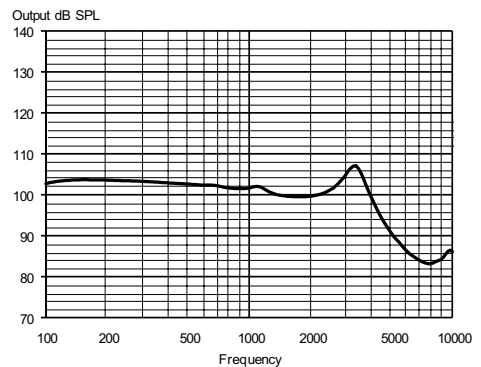

OUTPUT - EAR SIMULATOR

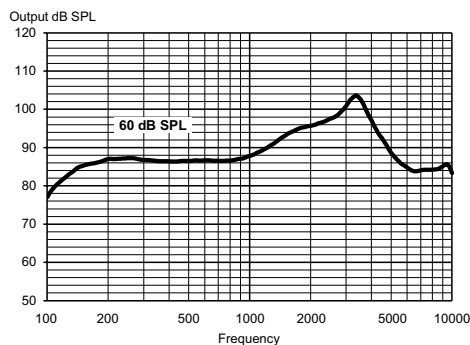

OUTPUT - 2CC COUPLER

