


## WIDEX EVOKE™ RIC 10 WITH SOUNDSSENSE TECHNOLOGY



The WIDEX RIC 10 is based on the WIDEX E-platform, with an Fluid Sound Controller that handles automatic processing more accurately and faster than before. WIDEX RIC 10 uses SoundSense Adapt to learn from the users' preferences and help guide them to a better, more personalised sound.

- Multiple wireless connectivity via WidexLink technology and TONELINK App
- Compatible with the DEX assistive listening devices
- 4 performance levels 440/330/220/110
- Uses an M-receiver
- Uses a size 10 battery
- Protection class IP68
- Minimal to severe hearing losses

### SUGGESTED FITTING RANGE

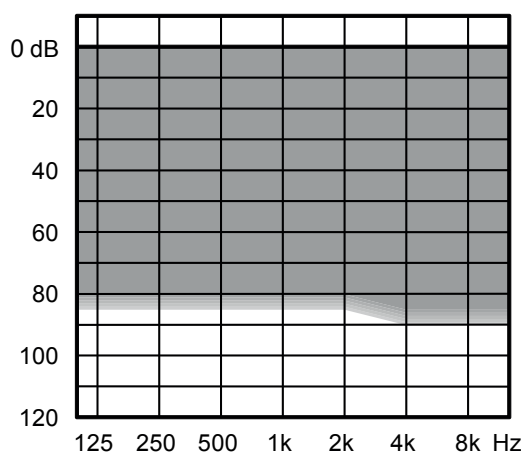

### STANDARD TECHNOLOGY

- E-platform with Fluid Sound Controller
- Improved open-fit Widex rationales
- Acclimatisation rationales
- Power Saver IV technology for low current consumption

| KEY FEATURES                        | 440    | 330   | 220  | 110 |
|-------------------------------------|--------|-------|------|-----|
| Performance                         | xxxxxx | xxxxx | xxxx | xx  |
| Processing and fine-tuning channels | 15     | 12    | 10   | 6   |

### CONNECTIVITY

| WidexLink to DEX assistive listening devices* |   |   |   |   |
|---|---|---|---|---|
|   | • | • | • | • |

### APPS FOR iOS AND ANDROID


| APP          |   |   |   |   |
|--------------|---|---|---|---|
| TONELINK App | • | • | • | • |
| COM-DEX App  | • | • | • | • |

### FEATURES


| FEATURE                              |         |        |   |   |
|--------------------------------------|---------|--------|---|---|
| Adaptation manager                   | •       | •      | • | • |
| Fluid Sound Analyser (sound classes) | 11 (IE) | 7 (IE) | 4 | 3 |
| Programs                             | 5       | 4      | 3 | 3 |
| Smartwind Manager                    | •       |        |   |   |
| High-frequency boost                 | •       |        |   |   |
| Speech Enhancer RT                   | RT/IE   | IE     |   |   |
| Digital Pinna                        | •       | •      |   |   |
| HD Locator                           | •       | •      | • |   |
| TruSound Softener                    | •       | •      | • |   |
| SoundSense Adapt                     | •       | •      | • |   |
| Preference Control                   | •       | •      | • | • |
| Soft-level noise reduction           | •       | •      | • | • |
| Noise Reduction                      | •       | •      | • | • |
| ZEN IE                               | •       | •      | • | • |
| Audibility Extender                  | •       | •      | • | • |

\*Also includes DEX assistive listening devices: CALL-DEX, TV-DEX, COM-DEX, UNI-DEX, RC-DEX, FM+ DEX, PHONE-DEX


## MAXIMUM OUTPUT - EAR SIMULATOR

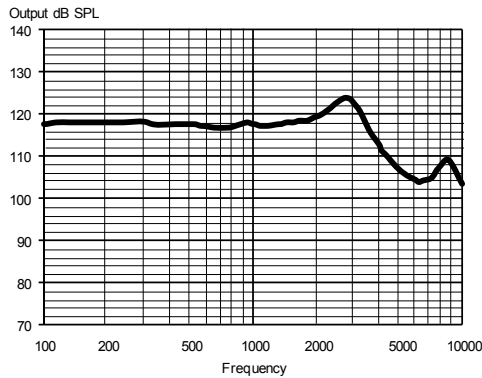


## MAXIMUM OUTPUT - 2CC COUPLER

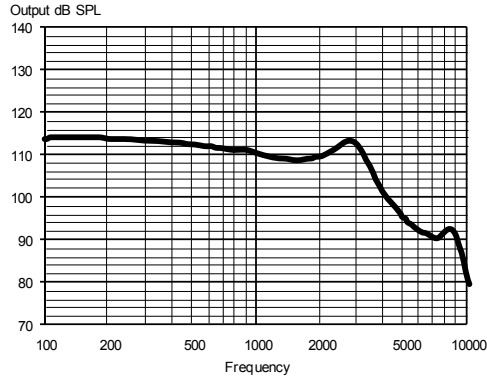

## OUTPUT - EAR SIMULATOR

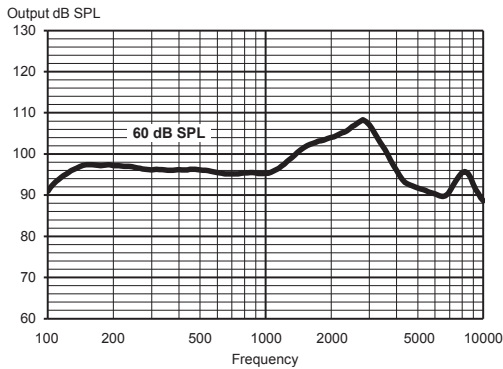

## OUTPUT - 2CC COUPLER

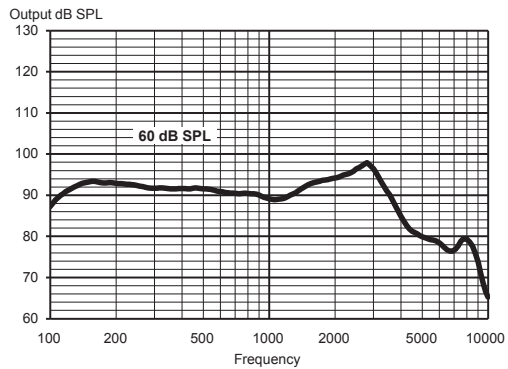

### Technical data:

Typical data obtained through standard pure tone measurements. Hearing aid set to Compass Reference Test Gain, unless stated otherwise. Measured using a standard ITE coupler without wax guard. For further information, please contact Widex at [global.widex.com](http://global.widex.com)

|   |         | EAR SIMULATOR<br>IEC 60118-0:1983 + A1:1994 | 2CC COUPLER<br>IEC 60118-0:2015 , ANSI S3.22-2014 |
|---|---------|---|---|
| OSPL90  | 1600 Hz | 118 dB SPL                                  | 109 dB SPL  |
|   | Peak    | 124 dB SPL                                  | 114 dB SPL  |
|   | Average | 118 dB SPL                                  | 111 dB SPL  |
| Acoustic output<br>(Input 60 dB SPL)                        | 1600 Hz | 102 dB SPL                                  | 93 dB SPL   |
|   | Peak    | 108 dB SPL                                  | 98 dB SPL   |
|   | Average | 98 dB SPL                                   | 93 dB SPL   |
| Full-on gain<br>(Input 50 dB SPL, Compass Full-on gain)     | 1600 Hz | 63 dB                                       | 54 dB   |
|   | Peak    | 69 dB                                       | 59 dB   |
|   | Average | 64 dB                                       | 56 dB   |
| Acoustic frequency range                                    |         | 100 Hz - 10000 Hz                           | 100 Hz - 9000 Hz                                  |
| Harmonic distortion (typical)                               | 500 Hz  | <2%   | <2%   |
|   | 800 Hz  | <2%   | <2%   |
|   | 1600 Hz | <2%   | <2%   |
| Equivalent input noise                                      |         | 22 dB SPL                                   | 22 dB SPL   |
| Battery drain (standby)                                     |         | 0.98 mA                                     | 0.98 mA   |
| Battery drain*  |         | 1.00 mA                                     | 1.02 mA   |
| Battery life (Type 10 Zn-Air, 100 mAh)*                     |         | 100 h                                       | 100 h   |
| Mobile phone immunity (IEC 60118-13:2016, ANSI C63.19:2011) |         | IRIL: -39/-7/-4 dB SPL                      | U-rating: M4                                      |

\* Battery life in real-life situations depends among other things on the hearing aid features used, streaming time, and the quality of the battery used.

Do not modify this equipment without authorization of the manufacturer. Spare parts and instructions for correct repair can be acquired from Widex.