


RIC with S-receiver

15/10E/10/5E/5



Fitting range

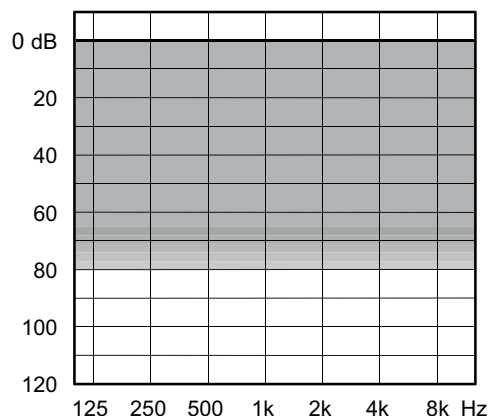

Minimal to moderately severe hearing losses

Key features	15	10E	10	5E	5
Processing channels	15	10	10	5	5
Linked Feedback Cancellation	Linked	Linked	Linked	Linked	•
Automatic Adaptive Directionality	15 ch.	10 ch.	10 ch.	5 ch.	Broadband
Real-Input	•	•	•	•	•
Noise Reduction w. Speech Focus	•	•	•	•	•
Listening programs	5	4	3	3	3
Linked Volume/Program Control	•	•	•	•	•
EasyVoice/EasyTone	•	•	•	•	•
Zen/Zen+	Linked	Linked	Linked	Linked	ZEN (no Zen+)
Sound Stabiliser	•	•	•	•	Basic
Wireless CROS compatible	•	•	•	•	•
RearView	•	•	•	•	
Linear frequency transposition	•	•	•	•	
Real Ear effect	•	•			
Impulse Noise Rejection II	•	•			
Linked Speech Enhancement System	Linked	•			
Phone Stream	•	•			
Linked Compression	•				
Personal Zen	•				
Accessories					
App for iPhone, Android and new functionality	Via COM-DEX	Via COM-DEX	Via COM-DEX	Via COM-DEX	Via COM-DEX
DEX accessories	•	•	•	•	•

Colours

- 021
 Warm Beige
- 081
 Tan Silk
- 072
 Winter Silver
- 073
 Titan Grey
- 074
 Midnight Black
- 071
 Capp. Brown
- 069
 Summer Gold


RIC with S-receiver

15/10E/10/5E/5


Technical data

		IEC 118-0	ANSI S3.22	
Output sound pressure level (Input 90 dB SPL)	2500 Hz	114	104	dB SPL
	Peak	118	108	dB SPL
	Average	110	103	dB SPL
Acoustic output (Input 60 dB SPL)	2500 Hz	95	85	dB SPL
	Peak	97	86	dB SPL
	Average	85	79	dB SPL
Full-on gain (Input 50 dB SPL)	2500 Hz	63	53	dB
	Peak	64	53	dB
	Average	58	51	dB
Telecoil output (Input 10 mA/m)	2500 Hz	83	72	dB SPL
	Peak	85	74	dB SPL
	Average	73	68	dB SPL
Frequency range		100 - 10000	100 - 8000	Hz
Total harmonic distortion (Input 70 dB SPL)	500 Hz	<2	<2	%
	800 Hz	<2	<2	%
	1600 Hz	<2	<2	%
Equivalent input noise level		20	23	dB SPL
Battery current (stand by)		0,95	0,95	mA
Battery current		0,97	0,97	mA
Battery life (Type 312 Zn-Air, 145 mAh)		150 (>135)	150 (>135)	h
Mobile phone immunity		IRIL: -3/-7 dB SPL	U-rating: M4/T2	


MAXIMUM OUTPUT - EAR SIMULATOR
IEC 118-0

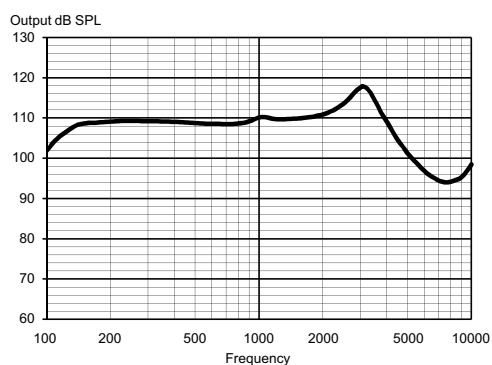

MAXIMUM OUTPUT - 2CC COUPLER
ANSI S3.22 (2009)

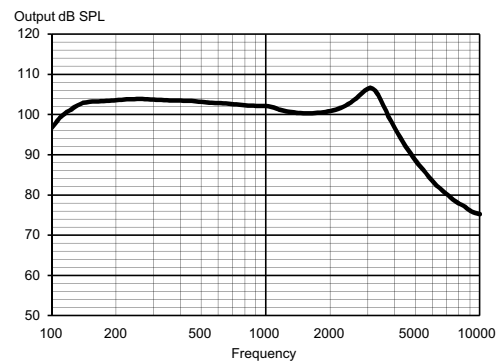

OUTPUT - EAR SIMULATOR
IEC 118-0

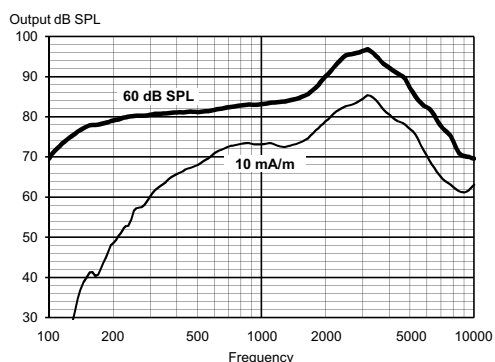

OUTPUT - 2CC COUPLER
ANSI S3.22 (2009)

